



A Great Choice for the
'Weatherization Contractor'

CM 1500

All-Fiber, Dense-Pack (retro-fit) SideWall,
Wall Spray, Attic Blow Machine.

Material	Production Rate/hr
Cellulose	1800 lbs
Fiberglass	500 lbs
Rockwool	1000 lbs

*Optional: double blower system

The **1500** series machine is an economical, compact, high production machine with low power requirements. The many options (blowers, input power, wheel package, hopper extension), offer choices to the small contractor that require versatility, production, and low maintenance in a high endurance machine. ('scalping' auger/shredder)

STANDARD FEATURES AND BENEFITS

Mechanical

- Large 10 cu./ft. hopper capacity fiber storage.
- Quick-release hopper offers fast access to airlock with easy handling and transport.
- Quick release auger provides easy access to airlock seal replacement and service.
- Slide-gate control provides precise control of fiber.
- High quality powder coating provides a long lasting corrosion resistant finish.
- Modular design with see-thru access panel for quick troubleshooting and maintenance.
- Dual 'scalping' auger/shredders increase fiber conditioning while providing consistent flow.
- High torque TEFC motor/reducer drive provides long motor life.
- #40 nickel plated chain and hardened sprockets, are rugged, and corrosion resistant.
- One or two integrally mounted 2 or 3-stage blowers w/check valve and filter protection.
- 150 ft. dual function (3-position) remote cord w/cord hanger, offers control and convenience.

Electrical

- Safety Features: kill switch and manual override controls promote increased operator safety and quick hazard response.
- Manual thermal overload protection of all motors and electrical components.
- Deluxe voltmeter for quick electrical diagnostics and low voltage protection of motors.
- Duplex auxiliary outlets for accessory devices.

CM 1500 SPECIFICATIONS

Weight

285 lbs.(1-blower)
300 lbs. (2-blower)

Dimensions

24" W x 32" L x 42" H
24" Wx 32" L x 56" H(CE)

Hopper Capacity

Main Hopper: 10 cu./ft.
(2 bags)
w/CE Hopper Extension:
15cu/ft. (3 bags)

Airlock

10" long x 10" diameter
3" output for blowing hose
Quick-release auger for access
to airlock seals.

Blowers

One,2-stage (120volt 8amp.)
One,3-stage (120volt 12.5amp.)
Two,2-stage(120volt 8amp.)
Two,3-stage (120volt 12.5amp.)
Overseas blowers
(230/240 volt, 4amp./6amp. 50hz.)

Power Requirements

Single input, 15/20 amp. 120
volt. Single Blower.
Double input, 15 amp. 120 volt.
Double Blower. (8amp &12amp)
(230volt /50 hz, for export)

Generator Size

5,000 watt or larger/ 1 blower
7,500 watt or larger/ 2 blower


Options

Blowers (2 or 3-stage) single
or double.
CE Hopper Extension
Wheel Package/air or hard tire
Power Inputs: single or double
CE Mark Conformity f/ export
Wireless Remote

BENEFITS

Warranty: One Year

The **1500** series machine
provides an economical, high
production machine with low
power requirements and reduced
weight/size in your truck/trailer
system. The simple design and
minimal moving parts provide a
machine that is low maintenance
and easy to repair.

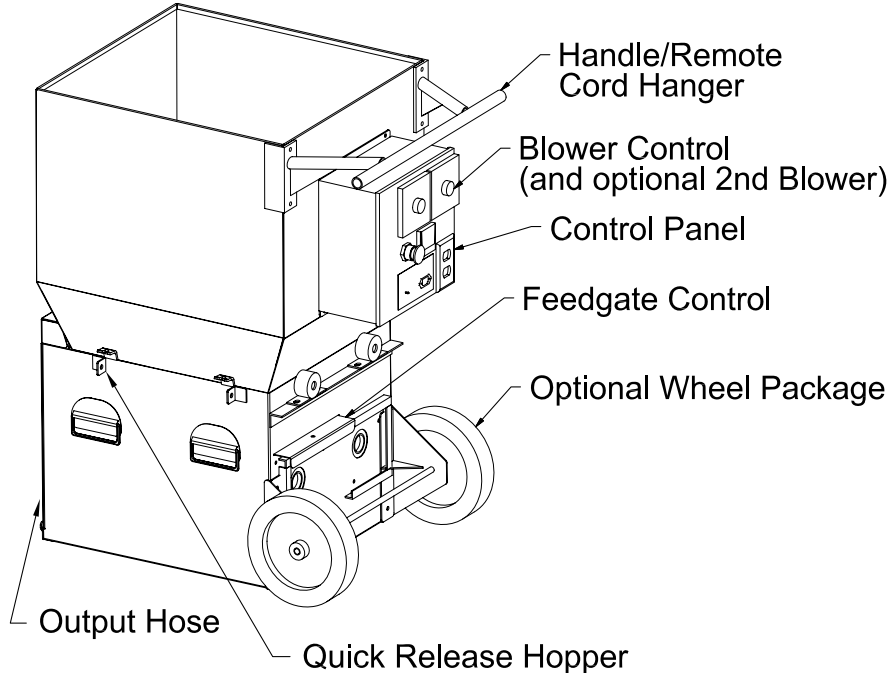

COOL People

President - Dave Krendl
Ofc: 419.232.4871
dave@coolmachines.com

General Manager - Andy Schulte
Ofc: 419.232.4871
andy@coolmachines.com

24/7 Tech Support:
Ofc: 419.234.5446
support@coolmachines.com